


Seatpost and Saddle installation Guide

AND IMPORTANT SAFETY INFORMATION


1 Minimum Insertion Depth Required

Insert the seat post past the minimum insertion mark. Operating the bicycle with the safety line visible can cause frame damage or personal injury.

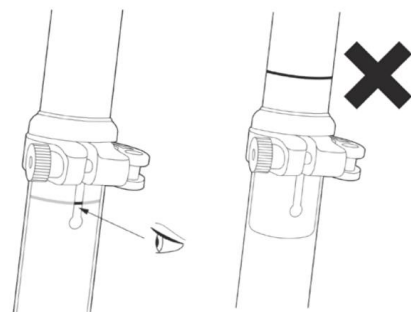


2 SADDLE LEVEL

Adjust the saddle to be roughly horizontal.
Use a level to check the alignment.

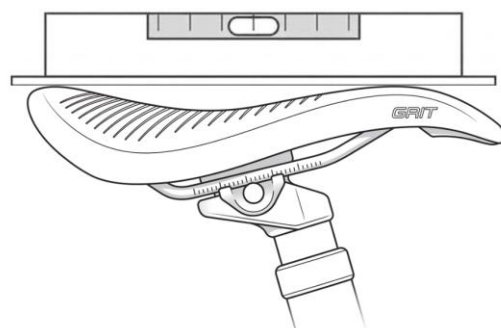


3 SADDLE RAIL CLAMPING RANGE

Clamp only the straight part of the rails within the marked intervals.

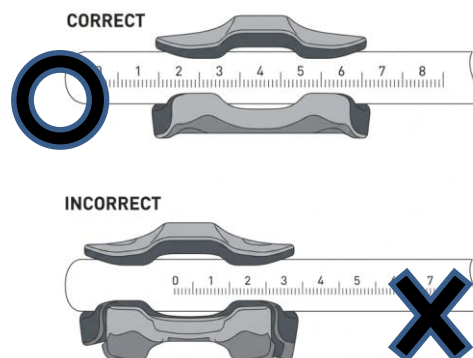

4 TORQUE TO SPEC

Tighten the torque wrench to the torque value indicated on the seat post.

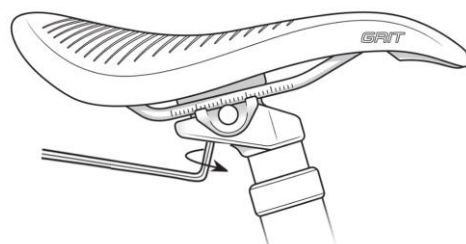

Note:

For your safety, check and re-tighten regularly.
It is recommended that you should take your bike in for a service check roughly around 3 months after owning the bike.